




# HR15 Wahoo Corded

El Tipi Barkod Okuyucular

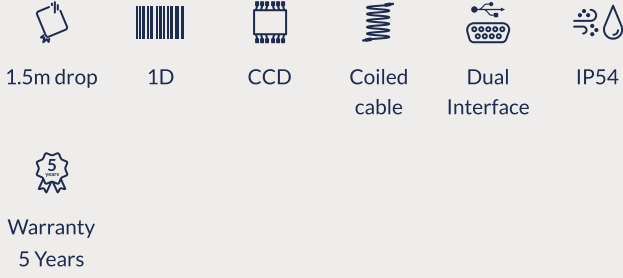

## Features

### Data Acquisition.

The HR15 Wahoo Corded handheld scanner is the corded model of HR15 Wahoo series and comes with a coiled cable. It supports common 1D barcodes and PDF417 and MicroPDF417 stacked 2D barcodes.

### Lightweight ergonomic design.

This corded handscanner lies comfortably in your hand and enables all day scanning comfort in scan-intensive situations. This helps reduce fatigue and protects the workforce productivity.

### Interface.

The HR15 Wahoo Corded supports standard RS-232 and USB interfaces.

### Durable Construction.

The HR15 Wahoo Corded was created to perform in harsh and demanding environments. With a sealing of IP54, this handheld scanner is protected against dust and moisture. With a drop resistance of 1.5m, it can withstand everyday drops and bumps.

### Application scenarios.

With good performance, this rugged and compact scanner is suitable for applications in supermarkets, shopping malls, warehouse environment application and more.

**5** Years Full  
Warranty

## TECHNICAL SPECIFICATIONS

# HR15 Wahoo Corded

### Veri Yakalama

1D	All major 1D symbologies, including Code 128, EAN-13, EAN-8, Code39, UPC-A, UPC-E, Codabar, Interleaved 2 of 5, ISBN, Code 93, UCC/EAN-128, GS1 Databar, PDF417 (max. 255 bytes), MicroPDF417 (max. 255 bytes).
Alan Derinliđi	31.5 mm - 465.6 mm
Yatay Görüş Alanı	42°
Aydınlatma	Kırmızı LED (620 nm)
Görüntü Sensörü	2500 CCD
Minimum Baskı Kontrastı	25%

Tarama Açısı Aralığı	±55°
Tarama Yatış Açısı	30°
Verev Tarama Açısı	±75°
Tarama Yöntemleri	Tetikleme Modu, Algılama Modu, Gecikmeli Algılama Modu, Manuel Mod, Sürekli Mod, Otomatik Mod, Göz Kırpma Modu
Tarama hızı	300 scans per second

#### Fiziksel

5VDC Çalışma akımı	135 mA (typical), 185 mA (max)
5VDC Bekleme akımı	75 mA
Boyutlar (mm)	113.5(W) x 73.3(D) x 159(H) mm
Kabuk	PC, ABS
Giriş Gerilimi	5 VDC ±%5
Arayüzler	USB, RS-232
Bildirimler	Bip sesi, LED
Güç Kaynağı Girişi	5 VDC (1.5 A)
Güç Kaynağı Çıkışı	AC100 to 240 V (50 to 60 Hz)
Ağırlık	152 g

#### Çevresel

Düşme	1.5 m
Elektrostatik Deşarj (ESD)	±8 kV (temas deşarjı), ±15 kV (hava deşarjı)
Nem	%5 ila %95 (yoğuşmasız)
IP Sınıfı	IP54
Çalışma Sıcaklığı	-20 °C ile 50 °C (-4 °F ile 122 °F)
Depolama Sıcaklığı	-20 °C ile 60 °C (-4 °F ile 140 °F)

#### Sertifikalar

Sertifikalar Donanım	CE EMC Class B, FCC Part15 Class B, IEC 62471, RoHS, KC
----------------------	---

#### Garanti

Kapsamlı Hizmet Sözleşmesi	3 Yıl, 5 Yıl
Garanti Koşulları	5 yıl

#### Aksesuarlar

Opsiyonel aksesuarlar	USB kablosu, USB-C kablosu, çoklu güç adaptörü, RS-232 kablosu, Duvara montaj klipsi, Katlanabilir akıllı stand
Standart aksesuarlar	USB kablosu

#### Kutuda neler var?

NLS-HR1550-35	HR15 Wahoo, 3,5 meter coiled USB cable
NLS-HR1550-35F	HR15 Wahoo, 3,5 meter coiled USB cable, Foldable smart stand
NLS-HR1550-37	HR15 Wahoo, 2 meter RS-232 cable
NLS-HR1550-38	HR15 Wahoo, 2 meter RS-232 cable, Multiplug adapter

# Accessories

---

## Şarj/Güç

ADP100 Power Supply for HR, FR, and FM Series (ADP100)

---

## Kablolar

CBL017U RJ to USB-C Cable for HR, FR and FM Series (CBL017U)  
CBL030UA USB Cable for HR12, HR32 and HR52 Series (CBL030UA)  
CBL036UA USB Cable for HR, FM, and FR Series (CBL036UA)  
CBL037R RS232 Cable for HR, FR, and FM Series (CBL037R)  
CBL042UA USB Cable for HR, FM, and FR Series (CBL042UA)  
CBL048U USB Cable for Ingenico iCT220 (CBL048U)  
CBL105U USB White Cable for HR Series (CBL105U)  
CBL128R Cable for Magellan Connection (CBL128R)

---

## Çevre Birimleri

EX232 Remora (NLS-EX232-01)

---

## Tabanlar ve tutucular

NLS-STD-WM001 Wall Mount Clip for HR Series (NLS-STD-WM001)  
NLS-STD20I-32 Smart Foldable Stand for HR15 to HR32 Series (NLS-STD20I-32)

---

### Newland AIDC EMEA

Feel free to contact us or a partner near you.

[info@newland-id.com](mailto:info@newland-id.com) - [newland-id.com](http://newland-id.com)

Specifications are subject to change without notice

© Newland AIDC EMEA 2026 - All rights reserved